


Product description

T153 BILKA corrugated sheet metal is manufactured in steel sheet, galvanized on both sides and protected with polyester. It is used for small inclination roofs and intermediate floors. It is the ideal and economic solution for construction and rehabilitation of facilities intended for: warehouses, shopping centers, production facilities, farms, silos, stables, sports centers etc.

Production Specifications

- BILKA T153 corrugated sheet metal is made with a nominal thickness between 0.75 - 2.5 mm, based on the construction requirements
- The standard length of the modules ranges from 0.500 m and 13.5 m. Execution of the modules with different lengths from the standard ones will be made after prior consultation with the technical specialist from BILKA.
- corrugated sheet metal modules are manufactured at a nominal width of 1,000/1,500 mm
- BILKA produces corrugated sheet metal T153 in 13 color

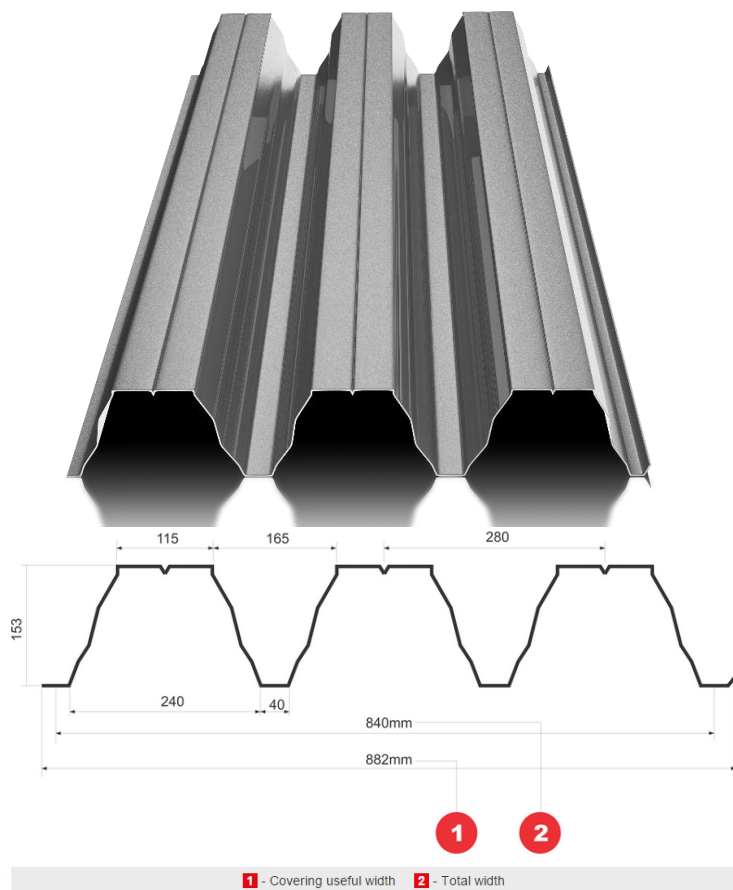

Technical Specifications

Material	Steel, galvanized sheet metal on both sides protected with polyester
Nominal thickness	0,75 - 2,5 mm
Total width	882 mm
Covering useful width	840 mm
Height of the corrugation	153 mm
Weight on the surface	10,71 - 17,87 kg/sqm
Guarantee	10 year warranty for color characteristics and corrosion
Endurance	50 - 60 years, resistance to temperature variations

BILKA STEEL SRL

Street Henri Coanda no. 17, Brasov
Tel: +4 0733.30.30.30 Fax: +4 0268.548.116

www.bilka.ro