

## Product description

T18 corrugated steel sheet is manufactured in steel sheet, galvanized on both sides and protected with polyester.

It is used especially on facades, fences or ceilings but can be mounted on the roof as covering.

## Production Specifications

- BILKA T18 corrugated sheet metal is manufactured with a nominal thickness between 0.3 - 0.7 mm, based on the construction requirements, the standard length of the modules ranges from 0.500 m and 13.5 m.



- corrugated sheet metal modules are manufactured at a nominal width of 1,000 and 1,150 mm Execution of modules with different lengths from the standard ones will be made after prior consultation with BILKA specialist.

- corrugated sheet metal is profiled in two options: with folds outward for facade and folds inward for the roofs

- 21 color options available, matt and glossy

- T 18 A for facade;

- T 18 B for the roof.

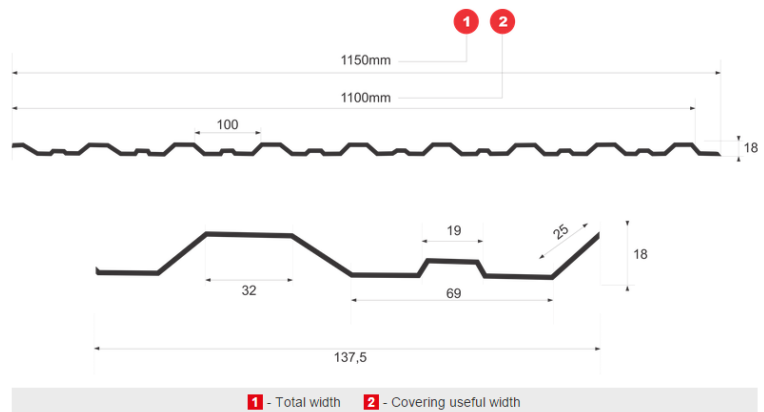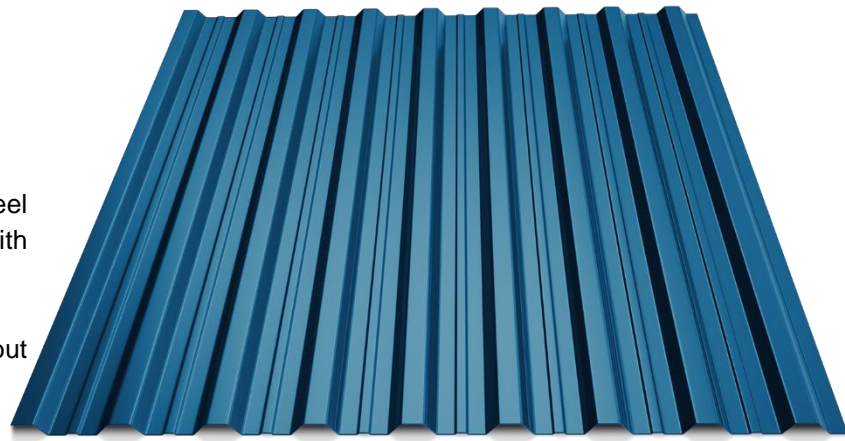

## Technical Specifications

Material	Steel, galvanized sheet metal on both sides protected with polyester
Nominal thickness	0,3 - 0,7 mm
Total width	1150 mm
Covering useful width	1100 mm
Height of the corrugation	18 mm
Weight on the surface	3 - 5 kg/sqm
Guarantees	10 year warranty for color characteristics and corrosion
Endurance	50 - 60 years, resistance to temperature variations

### BILKA STEEL SRL

Street Henri Coanda no. 17, Brasov  
Tel: +4 0733.30.30.30 Fax: +4 0268.548.116

[www.bilka.ro](http://www.bilka.ro)