

Product description

The corrugated steel sheet T60 is especially used in constructions of industrial used (warehouses, industrial, commercial constructions etc). It is used as a support for terrace roofs inclined up to 5°, in combination with insulation and final roofing products. The corrugated metal sheet T60 is used by builders and for the intermediate floors in multi-level buildings.


Production Specifications

- BILKA T60 corrugated steel sheet is made with a nominal thickness between 0.75 - 1.25 mm, based on the construction requirements

- the standard length of the modules ranges from 0.500 m to 13.5 m. Execution of modules with different lengths from the standard ones will be made after prior consultation with BILKA specialist.

- corrugated sheet modules are manufactured at a nominal width of 980 mm

- available in 21 color, mat and glossy options

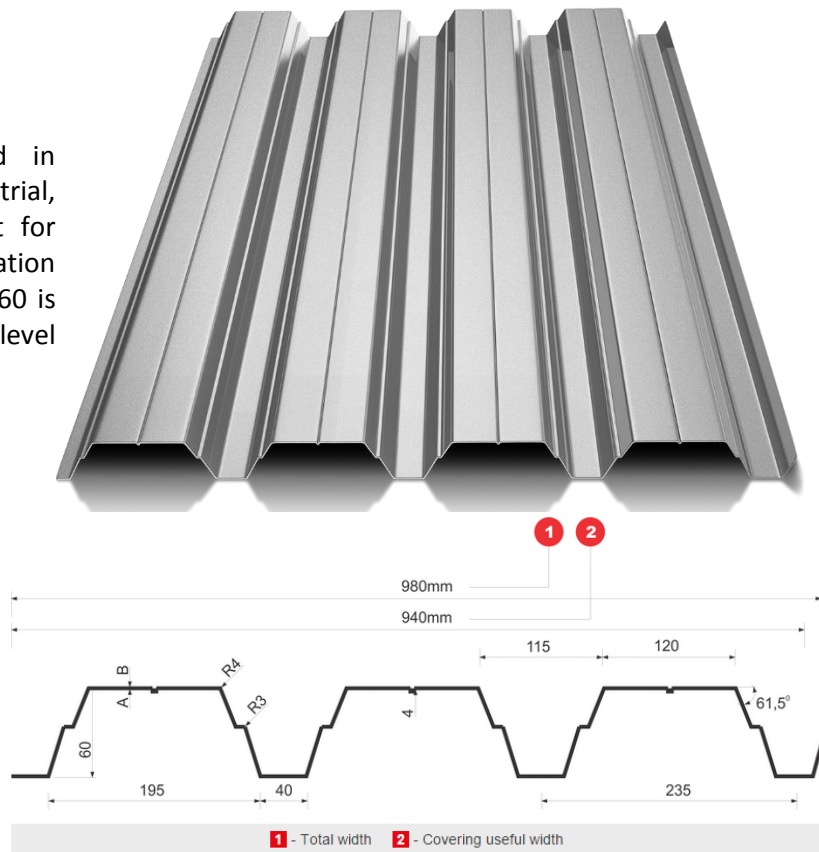

Technical Specifications

Material	Steel, galvanized sheet metal on both sides protected with polyester
Nominal thickness	0,75 - 1,25 mm
Total width	980 mm
Covering useful width	940 mm
Height of the corrugation	60 mm
Weight on the surface	7,64 - 12,5 kg/sqm
Guarantees	10 year warranty for color characteristics and corrosion
Endurance	50 - 60 years, resistance to temperature variations

BILKA STEEL SRL

Street Henri Coanda no. 17, Brasov
Tel: +4 0733.30.30.30 Fax: +4 0268.548.116

www.bilka.ro